

Pressure transmitter with flameproof enclosure

For applications in explosion-protected areas

Models E-10 and E-11

WIKA data sheet PE 81.27



for further approvals
see page 6

Applications

- Borehole monitoring
- Refineries and petrochemical industry
- Drilling platforms and pipelines
- Gas compressors

Special features

- CSA and FM approved as “explosionproof” for class I, div. 1 hazardous areas
- ATEX and IECEx approved as “flameproof enclosure” for II 2G Ex db IIC T6...T1 Gb
- Current or voltage output
- Designed for harsh ambient conditions
- Low-power version available as an option



Fig. left: Model E-10, standard version (ATEX, IECEx)

Fig. centre: Model E-10, standard version (FM, CSA)

Fig. right: Model E-11, with flush diaphragm (FM, CSA)

Description

The model E-10 and E-11 flameproof pressure transmitters have been designed specifically for the high demands of industrial oil and gas applications.

These pressure transmitters can be delivered with various analogue signals from 4 ... 20 mA to a low-power version with DC 1 ... 5 V.

They feature an exceptionally high resistance to vibration, pressure spikes and moisture ingress. Furthermore, these pressure transmitters fulfil IP67 (NEMA 4x) ingress protection.

On each individual instrument a comprehensive quality control and calibration is performed, so that an accuracy of $\leq 0.5\%$ can be ensured. Temperature compensation guarantees accuracy and long-term stability, even with strong fluctuations in the ambient temperature.

The models E-10 and E-11 are suitable for sour gas applications and feature particularly high resistance against sulphide stress cracking when in contact with sulphurous gases.

The pressure transmitters are approved as “explosionproof” for class I, II, III, div. 1 hazardous areas to FM and CSA as well as “flameproof” for II 2G Ex db IIC T6...T1 Gb to ATEX and IECEx.

Measuring ranges

Gauge pressure							
bar	Measuring range	0 ... 0.4	0 ... 0.6	0 ... 1	0 ... 1.6	0 ... 2.5	0 ... 4
	Overpressure limit	3.1	3.1	3.1	6.2	6.2	14
	Measuring range	0 ... 6	0 ... 10	0 ... 16	0 ... 25	0 ... 40	0 ... 60
	Overpressure limit	31	31	62	62	80	120
	Measuring range	0 ... 100	0 ... 160	0 ... 250	0 ... 400	0 ... 600 ²⁾	0 ... 1,000 ¹⁾
	Overpressure limit	200	320	500	800	1,200	1,500
psi	Measuring range	0 ... 5	0 ... 10	0 ... 15	0 ... 25	0 ... 30	0 ... 60
	Overpressure limit	45	45	45	89	89	203
	Measuring range	0 ... 100	0 ... 160	0 ... 200	0 ... 250	0 ... 300	0 ... 500
	Overpressure limit	449	899	899	899	899	1,160
	Measuring range	0 ... 600	0 ... 750	0 ... 1,000	0 ... 1,500	0 ... 2,000	0 ... 3,000
	Overpressure limit	1,160	1,740	1,740	2,900	4,600	7,200
	Measuring range	0 ... 5,000	0 ... 8,000 ²⁾	0 ... 10,000 ¹⁾	0 ... 15,000 ¹⁾		
	Overpressure limit	11,600	17,400	17,400	21,750		

1) Measuring range not for model E-11.

2) Measuring range not for model E-11 with FM and CSA approval

Absolute pressure						
bar	Measuring range	0 ... 0.4	0 ... 0.6	0 ... 1	0 ... 1.6	0 ... 2.5
	Overpressure limit	2	4	5	10	10
	Measuring range	0 ... 4	0 ... 6	0 ... 10	0 ... 16	
	Overpressure limit	17	35	35	80	
psi	Measuring range	0 ... 15	0 ... 25	0 ... 30	0 ... 60	0 ... 100
	Overpressure limit	72	145	145	240	500

Vacuum and +/- measuring range						
bar	Measuring range	-1 ... 0	-1 ... +0.6	-1 ... +1.5	-1 ... +3	-1 ... +5
	Overpressure limit	2	4	5	10	17
	Measuring range	-1 ... +9	-1 ... +15	-1 ... +25		
	Overpressure limit	35	35	50		
psi	Measuring range	-30 inHg ... 0	-30 inHg ... +30	-30 inHg ... +60	-30 inHg ... +100	-30 inHg ... +200
	Overpressure limit	29	145	240	500	1,160
	Measuring range	-30 inHg ... +300				
	Overpressure limit	1,160				

The given measuring ranges are also available in mbar, MPa, kPa, kg/cm² and further units.

Vacuum tightness

Yes

Output signals

Selectable versions	
Signal type	Signal
Current (2-wire)	4 ... 20 mA
Voltage (3-wire)	DC 0 ... 5 V
	DC 0.5 ... 4.5 V
	DC 1 ... 5 V (low power)
	DC 0 ... 10 V

Load in Ω

4 ... 20 mA:	$\leq (\text{power supply} - 10 \text{ V}) / 0.02 \text{ A}$
DC 0 ... 5 V:	$> \text{maximum output signal} / 1 \text{ mA}$
DC 0.5 ... 4.5 V:	$> 100\text{k}$
DC 1 ... 5 V:	$> 100\text{k}$
DC 0 ... 10 V:	$> \text{maximum output signal} / 1 \text{ mA}$

Voltage supply

Power supply

The power supply depends on the selected output signal.

4 ... 20 mA:	DC 10 ... 30 V
DC 0 ... 5 V:	DC 10 ... 30 V
DC 0.5 ... 4.5 V:	DC 5 ... 30 V
DC 1 ... 5 V:	DC 6 ... 30 V
DC 0 ... 10 V:	DC 14 ... 30 V

Max. power consumption

1 W

Reference conditions (per IEC 61298-1)

Temperature

15 ... 25 °C

Atmospheric pressure

860 ... 1,060 mbar

Humidity

45 ... 75 % r. h.

Power supply

DC 24 V

Mounting position

Calibrated in vertical mounting position with process connection facing downwards.

Accuracy specifications

Accuracy at reference conditions

0.5 % of span

Including non-linearity, hysteresis, zero offset and end value deviation (corresponds to measured error per IEC 61298-2).

Non-linearity (per IEC 61298-2)

≤ 0.2 % of span (BFSL)

Non-repeatability

≤ 0.1 % of span

Temperature error in range 0 ... 80 °C (32 ... 176 °F)

Mean temperature coefficient of zero point:

≤ 0.2 % of span/10 K

Mean temperature coefficient of span:

≤ 0.2 % of span/10 K

Settling time

≤ 2 ms

≤ 10 ms (at medium temperature < -30 °C and measuring range ≤ 0 ... 25 bar; for model E-11)

Long-term stability

≤ 0.2 % of span/year

Operating conditions

Ingress protection (per IEC 60529)

IP67 (NEMA 4x)

Vibration resistance (per IEC 60068-2-6)

20 g
10 g (for variant ½ NPT male conduit, with potted cable outlet)

Shock resistance (per IEC 60068-2-27)

1,000 g (mechanical shock)
100 g (for variant ½ NPT male conduit, with potted cable outlet)

Permissible temperature ranges

■ for instruments per ATEX and IECEx

Ambient and medium:

T6: -40 ... +60 °C T6: -40 ... +140 °F
T5: -40 ... +75 °C T5: -40 ... +167 °F
T4: -40 ... +102 °C T4: -40 ... +215 °F

Storage:

-40 ... +102 °C -40 ... +215 °F

-40 °C (-40 °F) only valid when no sealing is used.
Sealings from NBR only admissible to -30 °C (-22 °F).
Sealings from FPM/FKM only admissible to -15 °C (5 °F).

■ for instruments per FM, CSA

Ambient and medium:

T6: -40 ... +60 °C T6: -40 ... +140 °F
T4: -40 ... +105 °C T4: -40 ... +221 °F

Storage:

-40 ... +105 °C -40 ... +221 °F

-40 °C (-40 °F) only valid when no sealing is used.
Sealings from NBR only admissible to -30 °C (-22 °F).
Sealings from FPM/FKM only admissible to -15 °C (5 °F).

Explosion protection

ATEX and IECEx

II 2G Ex db IIC T6...T1 Gb (KEMA 05 ATEX 2240 X)
Ex db IIC T6...T1 Gb (IECEx DEK 15.0048X)

FM

XP / I / 1 ABCD / T6, T4
DIP / II, III / 1 EFG / T6, T4 type 4

CSA

Class I, division 1, groups A, B, C and D
Class II, division 1, groups E, F and G
Class III, division 1
Type 4X

Process connections

Process connections for model E-10

Selectable versions	
Process connection per	Thread size
DIN 3852-E 1)	G ¼ A
EN 837	G ¼ B
	G ¼ female
	G ½ B
ANSI/ASME B1.20.1	½ NPT
	¼ NPT
	¼ NPT female
	½ NPT

1) Max. ambient and medium temperature range, sealing for process connection: -30 ... +100 °C

Process connections for model E-11

For the flush process connections there is a limited selection of measuring ranges

Selectable versions		
Process connection per	Thread size	Available for measuring ranges
-	G ½ B flush	0 ... 2.5 to 0 ... 600 bar
-	G 1 B flush	0 ... 0.4 to 0 ... 1.6 bar

Sealing for model E-11

Selectable versions	
Standard	NBR
Option 1	FPM/FKM
Option 2	EPDM

Sealing material restrictions for G ½ B flush process connection

Material	Max. measuring range [bar]			
	T = -40 °C	T = -30 °C	T = -15 °C	T = 105 °C
NBR	-	600	600	600
FPM/FKM	-	-	400	400
EPDM	200	200	200	200

T = ambient and medium temperature

Materials

Wetted parts

- Stainless steel (additionally Elgiloy® for model E-10 with measuring range > 0 ... 25 bar, NACE-compliant)
- For sealing materials see "Process connections"

Where the medium is hydrogen, contact the manufacturer.

Non-wetted parts

Case from stainless steel

For cable see "Electrical connections"

Internal pressure transmission medium

Synthetic oil (no pressure transmission medium for model E-10 with measuring range > 0 ... 25 bar)

For other materials see WIKA diaphragm seal programme

Electrical connections

Selectable versions				
Electrical connection	Wire cross-section	Cable diameter	Cable lengths	Material
½ NPT male conduit, with potted cable outlet (ATEX and IECEx approval)	3 x 0.5 mm ² AWG20	6.8 mm	2 m, 5 m	Polyolefin copolymer
½ NPT conduit male, with cable outlet (FM and CSA approval)	3 x 0.56 mm ² AWG20	5.4 mm	up to 9 m	PVC
½ NPT male conduit with potted cable leads (FM and CSA approval)	3 x 0.5 mm ² AWG20	3 x 2.6 mm	up to 9 m	Polyolefin

Short-circuit resistance

S₊ vs. U₋


Reverse polarity protection

U₊ vs. U₋


Insulation voltage

DC 500 V

Connection diagrams

½ NPT male conduit, with potted cable outlet (ATEX and IECEx approval)			
		2-wire	3-wire
	U+	red	red
	U-	black	black
	S+	-	brown
	Shield	Shield connected to case	

½ NPT male conduit with potted cable leads (FM and CSA approval)			
		2-wire	3-wire
	U+	red	red
	U-	black	black
	S+	-	brown
	Shield	green	green

½ NPT conduit male, with cable outlet (FM and CSA approval)			
		2-wire	3-wire
	U+	red	red
	U-	black	black
	S+	-	brown
	Shield	Shield connected to case	


Approvals (option)

Logo	Description	Country
	EC declaration of conformity <ul style="list-style-type: none"> ■ EMC directive EN 61326 emission (group 1, class B) and interference immunity (industrial application) ■ Pressure equipment directive ■ ATEX directive, flameproof (Ex d), EN 60079-0, EN 60079-1, EU 	European Community
	IECEX Hazardous areas flameproof (Ex d), IEC 60079-0, IEC 60079-1	IECEX member states
	FM Hazardous areas Explosionproof class 3600, class 3615, class 3810, NEMA-250	USA
	CSA <ul style="list-style-type: none"> ■ Safety (e.g. electr. safety, overpressure, ...) ■ Hazardous areas Class 2258 02, class 2258 82 	USA and Canada
	EAC <ul style="list-style-type: none"> ■ Electromagnetic compatibility ■ Hazardous areas 	Eurasian Economic Community
	GOST Metrology, measurement technology	Russia
	KazInMetr Metrology, measurement technology	Kazakhstan
	MTSCHS Permission for commissioning	Kazakhstan
	BelGIM Metrology, measurement technology	Belarus
	Uzstandard Metrology, measurement technology	Uzbekistan
	KOSHA (KCs) Hazardous areas	South Korea
	CRN Safety (e.g. electr. safety, overpressure, ...)	Canada


Approvals and certificates, see website

Dimensions in mm


½ NPT male conduit with potted cable outlet (ATEX and IECEx approval)

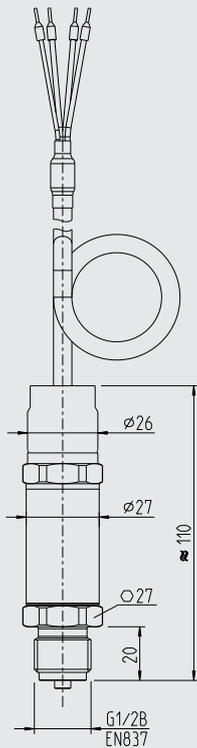


½ NPT male conduit with cable outlet (FM and CSA approval)

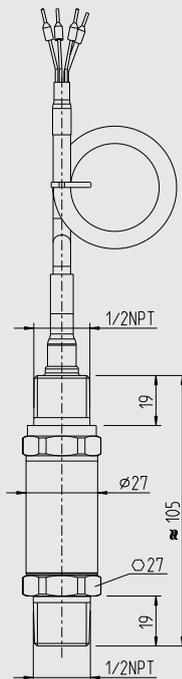


½ NPT male conduit with potted cable leads (FM and CSA approval)

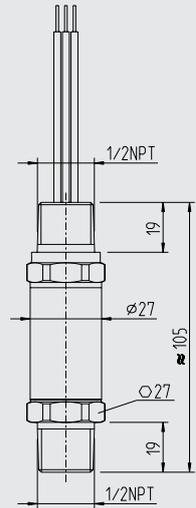


Process connections model E-10

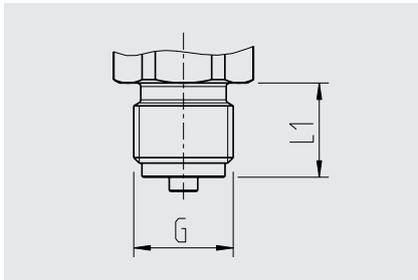


G	L1
G ¼ B	13
G ½ B	20

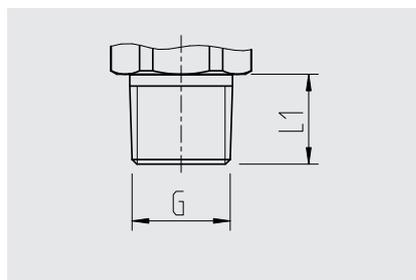


G	L1
¼ NPT	10
¼ NPT	13
½ NPT	19

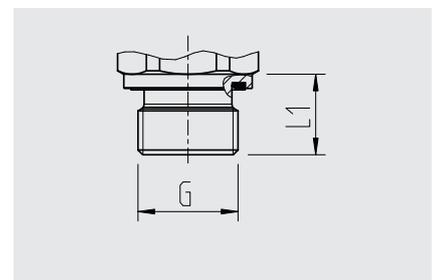

G	L1
G ¼ A	14


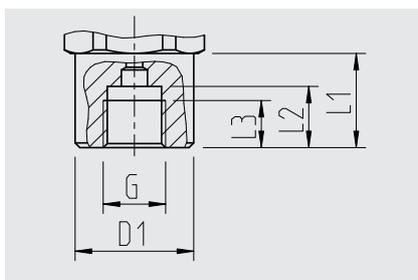


G	L1	L2	L3	D1
G ¼ female	19.5	13	10	Ø17.5

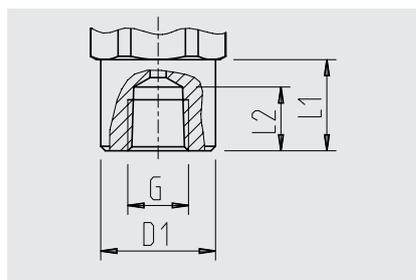

G	L1	L2	D1
¼ NPT female	20	14	Ø 26.5

Process connections model E-11

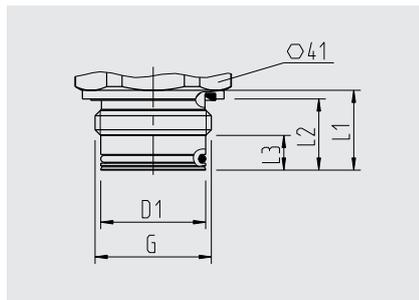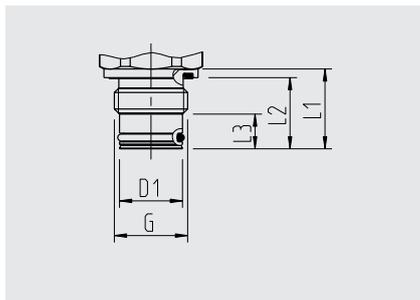

G	L1	L2	L3	D1
G ½ B	23	20.5	10	Ø 18

G1	L1	L2	L3	D1
G 1 B	23	20.5	10	30

For information on tapped holes and welding sockets, see Technical information IN 00.14 at www.wika.com

Ordering information

Model / Measuring range / Output signal / Electrical connection / Process connection / Sealing

© 2006 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKAI Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
Fax +49 9372 132-406
info@wika.de
www.wika.de